

# High-Efficiency Circulators and Water Heater Leak Protection From Taco



#### LeakBreaker™ Water Heater Shut-Off

- · Consists of a control unit, valve with actuator and sensor
- · Can be installed on any style water heater to shut-off the incoming water supply
- · Two color LED light and audible alarm lets you know the status at all times

## 007E F2 ECM High-Efficiency Circulator

- · High-efficiency ECM motor uses up to 85% less electricity
- · Ideal for hydronic systems zoned with circulators or zone valves
- · BIO Barrier protects pump from system contaminants
- SureStart automatically frees locked rotor condition and self-purges air from pump
- · Integral Flow Check included



REBATES AVAILABLE!
\$25 IN CT FROM ENERGIZE CT AND
\$100 IN MA FROM MASS SAVES



- · 3 easy settings. Install it, forget it.
- · BIO Barrier protects pump from system contaminants
- · SureStart automatic unblocking and air purging mode
- · Uses up to 85% less electricity
- Integral Flow Check included










## Our \$101 March Specials for





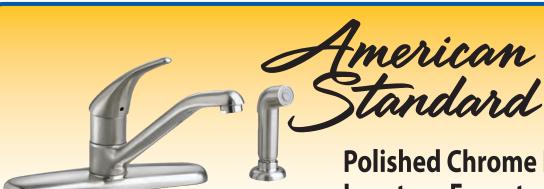

## **Colony Soft Kitchen** Faucet Single Control with Separate Spray and Metal Lever

Handle - 4 Hole #266184



**Polished Chrome Fluent** Lavatory Faucet
Monoblock with SC Drain

#1146710









TORRCO

Save the Date! TORRCO

ANNUAL TRADE SHOW!

Thursday, August 30th
The Aqua Turf Club in Plantsville, CT

# ProLine® Master Gas Water Heaters

Built with commercial-grade components, our ProLine® Master gas water heaters come with an 8-year warranty. With their impressive combination of innovation and durability, these models are designed to deliver years of reliable performance.



**ACSmith** 



Someday someone will invent a word that combines

# INNOVATION, GREAT DESIGN & FLEXIBILITY.

For now

### WE'RE STICKING WITH CYCLONE.

- Produces 94% thermal efficiency, which saves money on operating costs, and increases hot water output
- Advanced electronics for more precise control of water temperature and simplified system diagnostics
- System allows combined vertical and horizontal vent runs, using 2", 3", or 4" PVC, ABS or CPVC pipe

