



# reSource

Your source for all things plumbing, heating, piping and HVAC



#682427

## Liberty Pumps®

### LIBERTY 257 SUMP PUMP

- 16 Gauge / 10' Quick-connect cord
- Vertical magnetic float switch
- Flow rate: 37 GPM @ 10'
- Max Flow: 51 GPM
- PSC Motor
- 3 Year Warranty (Final Bill of Sale)

## UPCOMING EVENTS

4/2	Multi-Vendor Counter Day	Danbury	7:00 AM - 1:00 PM
4/17	Airzone Training	Waterbury	12:00 PM - 2:00 PM
4/24	LG MLV-01/98/99	Waterbury	8:30 AM - 3:00 PM
5/8	LG DFS 01/04	Waterbury	8:30 AM - 3:00 PM
5/22-23	Power Flame Training	Craft Kitchen	ALL DAY

Visit [www.TorrcoPro.com](http://www.TorrcoPro.com) to register and to see other upcoming events.



# reSource

Your source for all things plumbing, heating, piping and HVAC



**NOW  
INSTOCK!!**

- 6 year warranty
- Separate O and B terminal available models
- Large touchscreen displays
- \$75 Energize CT rebate available

**RS10420 Programmable  
WIFI Thermostat  
# 1693311**



**RS9220 Programmable  
2H 2C Thermostat  
# 1693308**



## Adapt Tankless.



**COMING SOON!**

### FEATURES:

- X3® Scale Prevention Technology
- Single stainless steel, heavy-duty heat exchanger
- Extends the life of the unit up to three times longer\*
- No warranty exclusions for hard water with X3 models
- Integrated Recirculation Pump
- Field convertible from Natural Gas to Liquid Propane, Kit Included
- 22:1 Turndown Ratio
- 1/2" Gas Line
- Venting Flexibility 2" up to 75' & 3" up to 150'



## American Standard

### FLASH® ROUGH-IN VALVES


- Quick Install
- Dependable
- Flat back
- Service stops
- Multiple connection types including ProPress
- Double ceramic Cartridge
- Compatible trims across all Lixil brands

# 1659813

**Flat Back**  
Allows the valve to be mounted flush with the cross brace

**Cast DZR Brass**  
Resists corrosion due to chloride and pH levels in water

**Straight Screwdriver Stops**  
Ensures easy servicing at the valve (on applicable models)

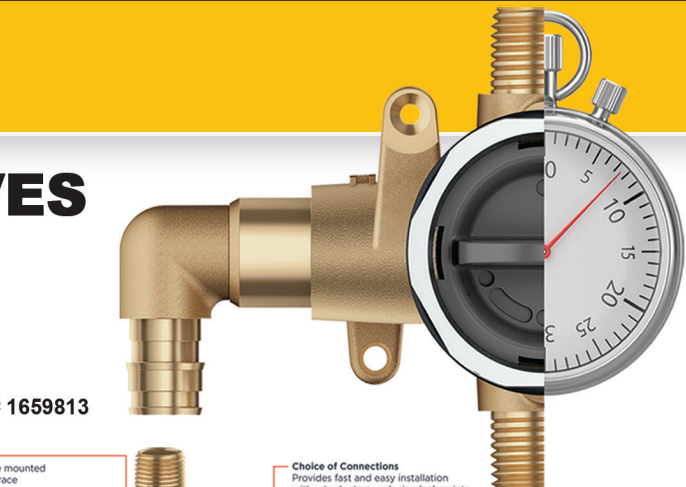

**Choice of Connections**  
Provides fast and easy installation without adapters, reducing leak points

**Test Cap**  
Allows installer to flush the lines simultaneously to prevent cross flow

**Stainless Steel Retaining Ring with Flats**  
Secures test cap/cartridge in place and eliminates the need for screws